




41A New London Tpke  
Glastonbury, CT 06033  
Tel 800-558-7080  
sales@tideindustrial.com  
www.tideindustrial.com

## CONVEYOR BELT

<b>Type</b>	<b>Polyurethane Food Belt</b>
<b>P/N</b>	1-1250
<b>Description:</b>	U2BL Poli-Glide 8M/2U/BU
<b>Color:</b>	Blue
<b>Nominal OAG:</b>	0.050" +/- .010
<b>Plies:</b>	2 Ply
<b>Fabric:</b>	Polyester
<b>Min Pulley Dia:</b>	.60"
<b>Top Surface:</b>	Smooth
<b>Bottom Surface:</b>	Bare
<b>Compound:</b>	Polyurethane
<b>Work Tension:</b>	126 lbs PIW
<b>Elongation:</b>	Less than 1%
<b>Weight PIW/FT:</b>	.026 lbs.
<b>Rec Temp Range:</b>	-4F to 212F
<b>Joining Method:</b>	Finger Splice; Lacing

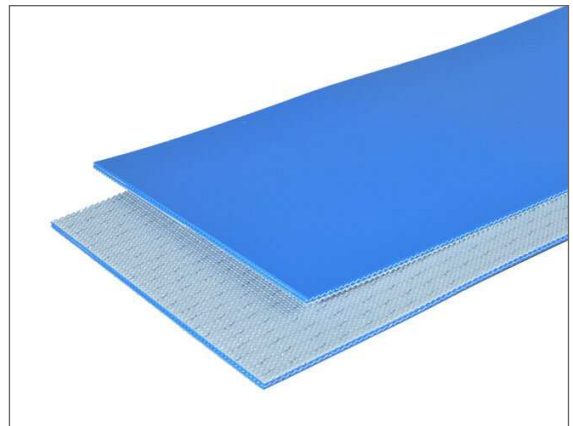

**Features:** Polyurethane belt with a non-adhesive cover that is abrasion-resistant and has good edge wear. Blue color improves visibility on inspection lines.

**Uses:** Belt used in food processing as an accumulation belt, diverting belt, dough belt, and general conveying belt. FDA compliant, sliderbed suitable.

*\* The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*