


CONVEYOR BELT

Type	White Polyester Urethane Belt
P/N	1-7010
Description:	U2W Poli-Urethane
Color:	White
Nominal OAG:	0.060" +/- .015
Plies:	2 Ply
Fabric:	Polyester
Min Pulley Dia:	0.6"
Top Surface:	Friction Surface
Bottom Surface:	Friction Surface
Compound:	Polyurethane
Work Tension:	45 lbs PIW
Elongation:	Less than 2%
Weight PIW/FT:	.030 lbs.
Rec Temp Range:	-22F to 176F
Joining Method:	Finger Splice; Lacing

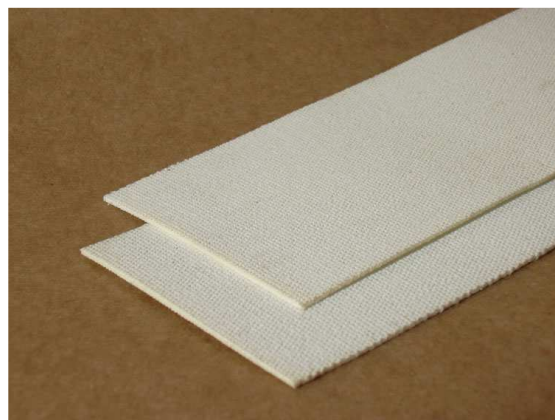

Features:

Polyester belt with a urethane skim and treated friction surfaces for long service life and clean product release. Thin, low-stretch construction handles small pulleys.

Uses:

Ideal for dough conveying, bakery production, pastry handling, vegetable processing, and cookie operations. Not recommended for chocolate.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*