




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type	Packaging Belt
P/N	2-1151
Description:	B1500 COS
Color:	Black
Nominal OAG:	0.160" +/- .015
Plies:	Plies: 1
Fabric:	Interwoven Polyester
Min Pulley Dia:	3"
Top Surface:	Smooth PVC
Bottom Surface:	Brushed
Compound:	PVC
Work Tension:	150 lbs. PIW
Elongation:	Less than 2%
Weight PIW/FT:	.090 lbs.
Temp Range:	0F to 180F
Joining Method:	Lap Splice; Lacing

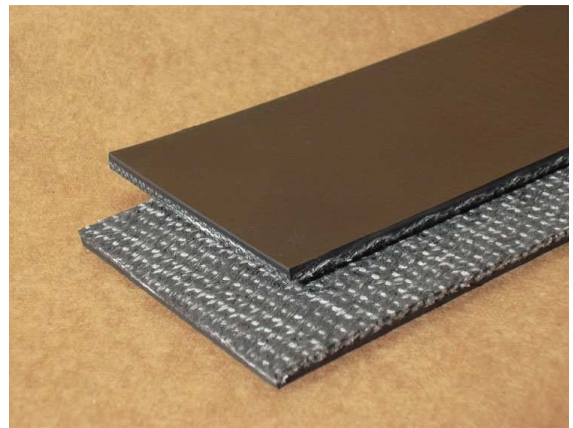

Attributes: Medium duty, general purpose conveyor belt used on many belting systems. Interwoven carcass plus brushed clean bottom surface for lower coefficient of friction. High strength, tear resistance, low stretch.

Applications: Popular in package conveying and for many medium duty belt conveyors including recycling, fruits, vegetables, baggage, distribution and agriculture.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*