




41A New London Tpke  
Glastonbury, CT 06033  
Tel 800-558-7080  
sales@tideindustrial.com  
www.tideindustrial.com

## CONVEYOR BELT

<b>Type</b>	<b>Rough Top Incline</b>
P/N	3-1102
Description:	2 Ply Rubber R/T
Color:	Black
Nominal OAG:	0.250" +/- .020
Plies:	2 Ply
Fabric:	Polyester
Min Pulley Dia:	2"
Top Surface:	Rubber Hemp Impression
Bottom Surface:	Bare
Compound:	SBR
Work Tension:	150 lbs PIW
Elongation:	Less than 2%
Weight PIW/FT:	.095 lbs.
Temp Range:	-20F to 250F
Joining Method:	Lap Splice; Lacing

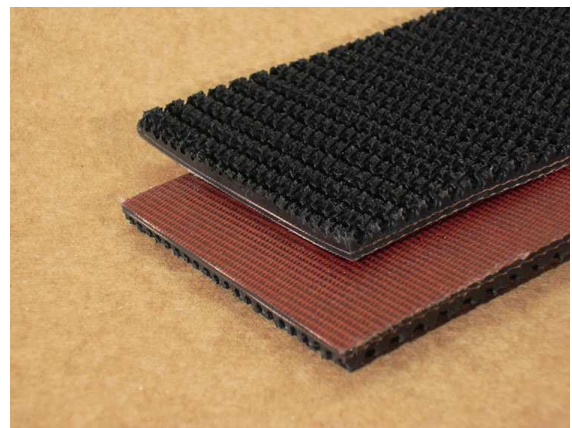

**Attributes:** Features excellent gripping for incline conveyors. High strength, low stretch polyester carcass.

**Applications:** Black rough top incline is one of our most popular incline belts and can handle many boxed, bagged or packaged goods. Also used on split wood conveyors.

*\* The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*