


## CONVEYOR BELT

<b>Type</b>	<b>Cleated Z Belt</b>
P/N	3-1615
Description:	B1500 Z-Cleat
Color:	Black
Nominal OAG:	0.250" +/- .020
	Recessed OAG: 0.140"
Plies:	1 Ply
Fabric:	Interwoven Polyester
Min Pulley Dia:	3"
Top Surface:	Z-Profile
Bottom Surface:	Brushed
Compound:	PVC
Work Tension:	150 lbs PIW
Elongation:	Less than 2%
Weight PIW/FT:	.091 lbs.
Rec Temp Range:	20F to 180F
Joining Method:	Finger Splice; Lacing

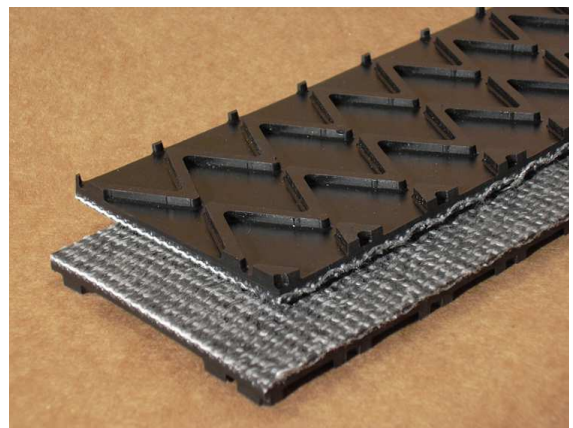

**Attributes:** Interwoven polyester carcass with a 1/8" raised Z profile. Belt has an oil resistant PVC compound. Z-Cleat must be recessed for lacing. OAG includes profile, use recessed OAG for lacing recommendation.

**Applications:** Incline Belt. Designed for use on light to medium duty applications to move product. Excellent for bulk haulage of many agricultural products.