




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type Cleated Z Belt
P/N 3-1620
Description: P2 B220 Z-Cleat

Color: Black
Nominal OAG: 0.450" +/- .020
Plies: 2 Ply
Fabric: Interwoven Polyester
Min Pulley Dia: 8"
Top Surface: 1/4" Z Profile
Bottom Surface: Skim
Compound: PVC
Work Tension: 220 lbs PIW
Elongation: Less than 2%
Weight PIW/FT: .172 lbs.
Rec Temp Range: 20F to 180F
Joining Method: Lap Splice; Lacing

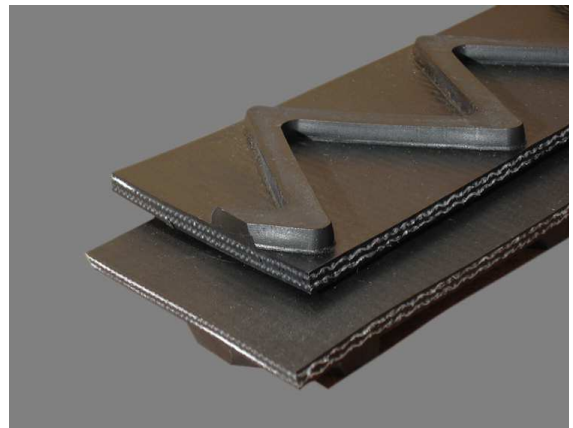

Attributes: Belt features a 1/4" high interconnected Z Profile. Heavy duty 2 ply interwoven belt. Thickness without the profile is .220.

Applications: Used in heavy duty applications benefiting from a profile to move product. Excellent for recycling applications, wood chips and agricultural uses.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*