




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type	Crescent Top
P/N	3-3512
Description:	B1200 Crescent Top
Color:	Black
Nominal OAG:	0.240" +/- .020, Rec OAG 0.140"
Plies:	1 Ply
Fabric:	Interwoven Polyester
Min Pulley Dia:	2"
Top Surface:	Crescent Impression
Bottom Surface:	Brushed
Compound:	PVC
Work Tension:	120 lbs PIW
Elongation:	Less than 2%
Weight PIW/FT:	.080 lbs.
Rec Temp Range:	0F to 180F
Joining Method:	Finger Splice; Lacing

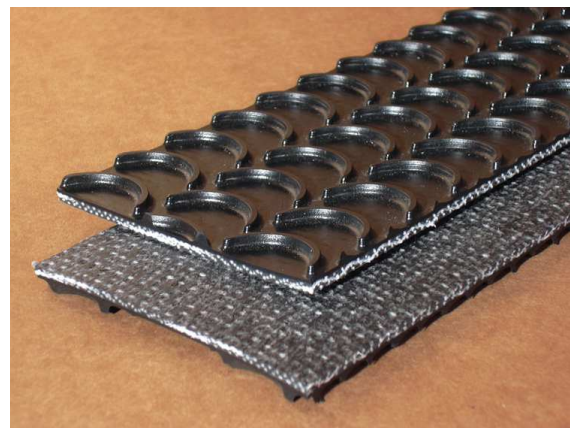

Attributes: Features an interwoven carcass with a 1/8" high half moon crescent impression. Belt has a brushed bottom for a low coefficient of friction and oil resistant PVC compound. Also available in white and in heavier gauges.

Applications: Crescent Top Belt is popular in the agricultural industry for conveying various material and in the post office for moving small packages.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*