




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type	White Chevron Top
P/N	3-3613
Description:	W1200 Chevron Top
Color:	White
Nominal OAG:	0.23" +/- .03, Recessed 0.14"
Plies:	1 Ply
Fabric:	Interwoven Polyester
Min Pulley Dia:	2"
Top Surface:	Chevron Impression
Bottom Surface:	Friction Surface
Compound:	PVC
Work Tension:	120 lbs PIW
Elongation:	Less than 2%
Weight PIW/FT:	.075 lbs
Rec Temp Range:	0F to 180F
Joining Method:	Lap Splice; Lacing

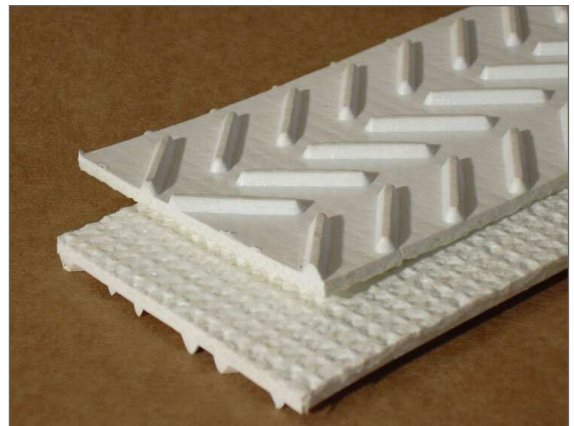

Features: Belt features an interwoven carcass with a 1/8" high white chevron impression top. The overall thickness includes the profile.

Uses: White chevron-top belt popular in the agriculture and food industry for conveying bulk materials. FDA compliant, slider-bed suitable, and useful in certain incline applications.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*