



41A New London Tpke  
Glastonbury, CT 06033  
Tel 800-558-7080  
sales@tideindustrial.com  
www.tideindustrial.com

## CONVEYOR BELT

**Type** Tan Gum Diamond  
Incline Belt

**P/N** 3-4402G

**Description:** 2 Ply Tan Gum Diamond Top

**Color:** Tan

**Nominal OAG:** 0.313" +/- 0.02"  
(recessed 0.15")

**Plies:** 2 Ply

**Fabric:** Polyester

**Min Pulley Dia:** 2.5"

**Top Surface:** Diamond Top Impression

**Bottom Surface:** Bare

**Compound:** SBR


**Work Tension:** 150 lbs PIW

**Elongation:** Less than 2%

**Weight PIW/FT:** .103 lbs

**Rec Temp Range:** -25F to 250F

**Joining Method:** Use Recessed OAG for Lacing

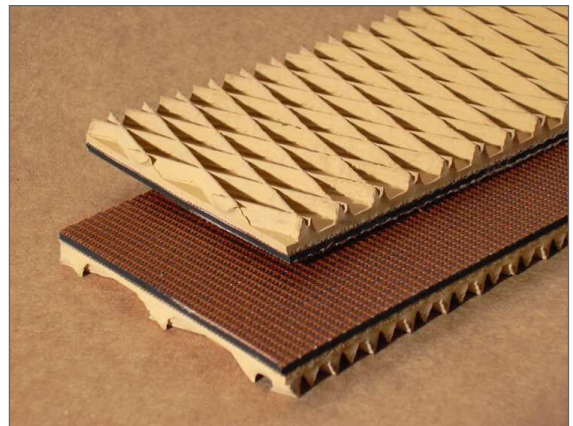

**Features:** High performance belt normally used for demanding steep inclines. This belt has a very high coefficient of friction due to the gum rubber. Rough top impression must be recessed to use lacing. This belt is also non-marking.

**Uses:** 2 Ply Tan Gum Diamond Top used for boxed, bagged and packaged goods applications. Popular belt also in the airline industry and in the post office. Sliderbed suitable.

*\* The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*