




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type	Feed and Grain
P/N	4-3006
Description:	6 Ply Tan Transmission HD

Color:	Tan
Nominal OAG:	0.315" +/- .020
Plies:	6 PLY
Fabric:	Cotton
Min Pulley Dia:	10"
Top Surface:	Friction Surface
Bottom Surface:	Friction Surface
Compound:	SBR
Work Tension:	210 lbs PIW
Elongation:	Less than 2%
Weight PIW/FT:	.171 lbs.
Rec Temp Range:	-20F to 250F
Joining Method:	Lap Splice; Lacing

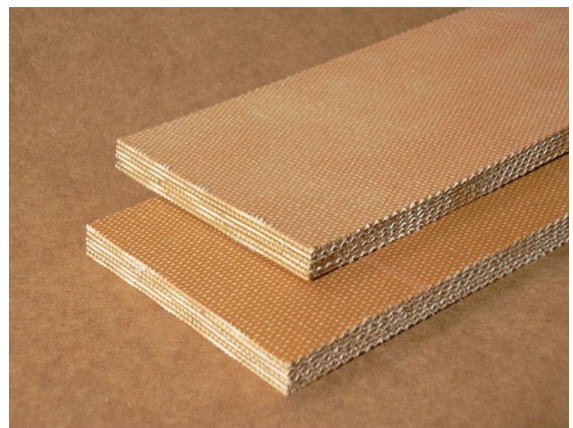

Features: Features 6 plies of cotton bonded together with heavy SBR skims. Tan rubber cover helps make this belt non-marking.

Uses: Popular in agriculture, in the feed and grain industry, as a light duty bucket elevator and for general conveying. Also used in heavy duty power transmission applications.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*