




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type	Package Slider Belt
P/N	4-4004
Description:	4 Ply Slider Top
Color:	Tan
Nominal OAG:	0.120" +/- .020
Plies:	Plies: 4
Fabric:	Cotton/Polyester
Min Pulley Dia:	2"
Top Surface:	Bare Nylon
Bottom Surface:	Friction Surface
Compound:	NBR
Work Tension:	50 lbs PIW
Elongation:	Less than 2%
Weight PIW/FT:	.069 lbs
Temp Range:	0F to 250F
Joining Method:	Lap Splice; Lacing

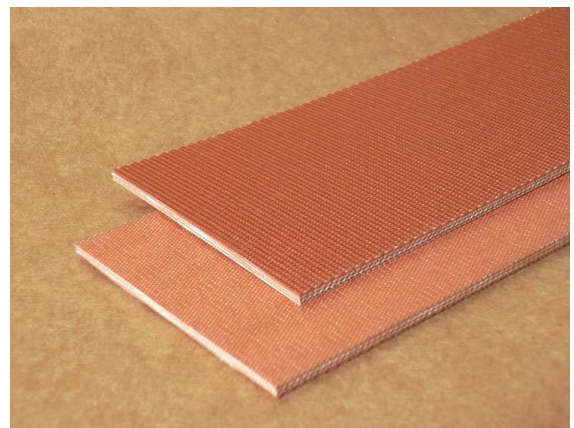

Attributes: Conveyor belt with a hard abrasion resistant nylon top surface. Very low friction designed for conveying where packaging and product needs to stay or slide as the belt moves.

Applications: Slider Top belt can be used in many packaging, diverting and sliding operations where product must slide or collect on the belt while it is moving.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*