




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type	Open Chevron Belt
P/N	5-6111
Description:	M15 Open Chevron 2 Ply 220 3/16 x 1/16
Color:	Black
Nominal OAG:	0.92" +/- 0.03" (recessed 0.36")
Plies:	2 Ply
Fabric:	Polyester/Nylon
Min Pulley Dia:	10"-16" (Tension Dep.)
Top Surface:	Green Cured Chevron Pattern
Bottom Surface:	Smooth Cover
Compound:	SBR
Work Tension:	220 lbs PIW
Elongation:	Less than 4%
Weight PIW/FT:	.217 lbs.
Rec Temp Range:	-20F to 250F
Joining Method:	Lap Splice/Lacing

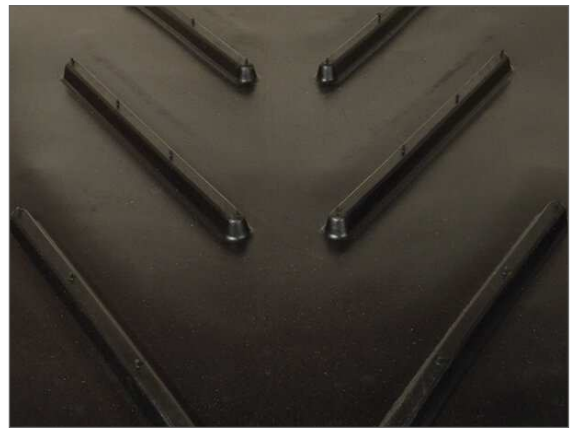

Features: 5-6111 is a green cured chevron belt. This durable belt is available 26", 28", 31.5", 36", 42" and 48" wide.

Uses: Popular belt in screening applications and where a tough, durable chevron pattern is required. Troughable.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*