




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type	Cleated Incline Belt
P/N	5-8532
Description:	330 1/8 x 1/16 Cleated Incline MOR
Color:	Black
Nominal OAG:	OAG 0.595" (Recessed 0.350")
Plies:	3 PLY
Fabric:	Polyester/Nylon
Min Pulley Dia:	12"-18" (tension dep.)
Top Surface:	1/4" Chevron Profile
Bottom Surface:	1/16" Cover
Compound:	MOR
Work Tension:	330 lbs. PIW
Elongation:	Less than 3%
Weight PIW/FT:	.225 lbs.
Temp Range:	-25F to 200F
Joining Method:	Lap Splice/Lacing

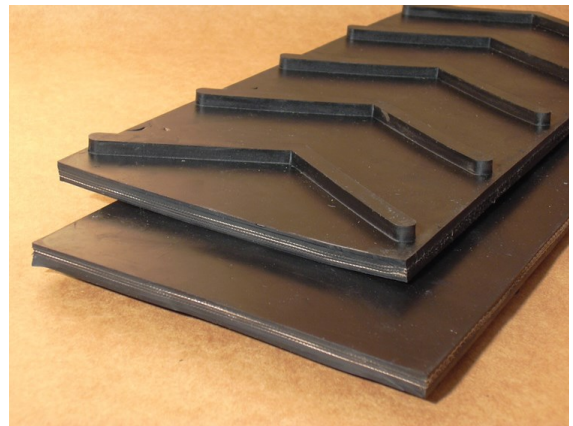

Features: 1/4" high x 6" wide chevron profiles available staggered across belt. Reinforced MOR belt for heavy duty incline with moderate oil resistance.

Uses: Heavy duty cleated incline belt for aggregate and other bulk conveying. Popular belt for incline in the wood industry and when handling oily products.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*