




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type	Cleated Belt
P/N	5-8642
Description:	2 Ply 150 Mini-Bite 1/32" x Bare
Color:	Black
Nominal OAG:	0.290" +/- .030
Plies:	2 Ply
Fabric:	Polyester
Min Pulley Dia:	8"
Top Surface:	Mini-Bucket Profile
Bottom Surface:	Bare
Compound:	SBR
Work Tension:	150 lbs PIW
Elongation:	Less than 2%
Weight PIW/FT:	.085 lbs.
Rec Temp Range:	-25F to 250F
Joining Method:	Lap Splice; Lacing

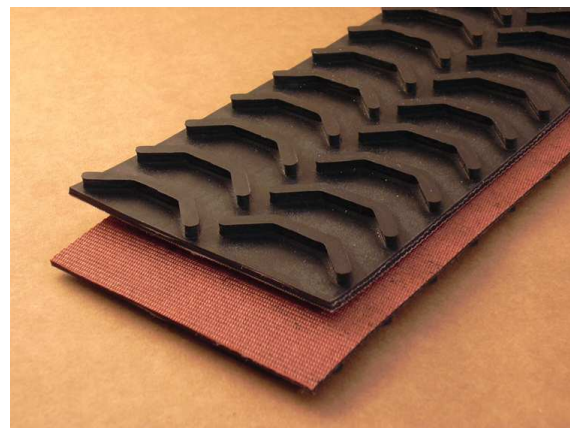

Attributes: Features 3/16" high by 1-3/4" wide mini bucket profiles in a staggered pattern. Cleats are spaced on 2" centers across the belt and 1" centers down. Bottom surface is bare.

Applications: Popular for carrying gravel, dirt, sand and other aggregate. Also used in the recycling industry and as a general purpose cleated belt.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*