




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type **Hi Heat**
P/N 6-5000
Description: 25 Mil Red Silicone

Color: Orange
Nominal OAG: 0.020" +/- .005
Plies: 1 Ply
Fabric: Fiberglass
Min Pulley Dia: 4"
Top Surface: Smooth
Bottom Surface: Wash Coat
Compound: Silicone
Work Tension: 50 lbs PIW
Elongation: Less than 1%
Weight PIW/FT: .020 lbs
Rec Temp Range: Up to 500F
Joining Method: Overlap Splice; Lacing

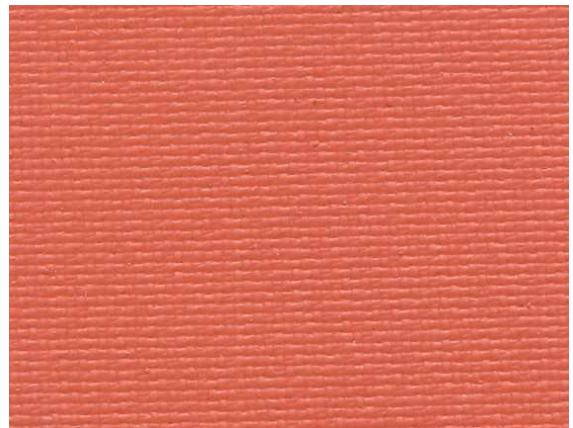

Attributes: Features a fiberglass carcass impregnated with silicone. Hi heat belt able to withstand up to 500F in many applications.

Applications: Red Silicone belting popular for shrink wrap tunnels, drying lines, ovens, screen printing and other application with extreme heat.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*