




41A New London Tpke
Glastonbury, CT 06033
Tel 800-558-7080
sales@tideindustrial.com
www.tideindustrial.com

CONVEYOR BELT

Type	General Purpose PVC
P/N	2-1121
Description:	B1200 COS
Color:	Black
Nominal OAG:	0.135" +/- .015
Plies:	1 Ply
Fabric:	Interwoven Polyester
Min Pulley Dia:	3"
Top Surface:	Smooth
Bottom Surface:	Brushed
Compound:	PVC
Work Tension:	120 lbs PIW
Elongation:	Less than 2%
Weight PIW/FT:	.07 lbs.
Rec Temp Range:	0F to 180F
Joining Method:	Finger Splice; Lacing

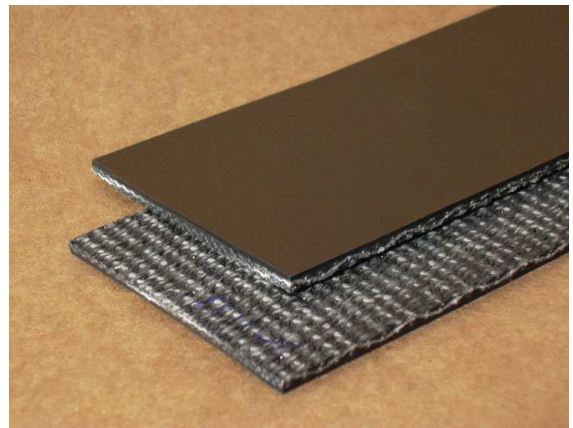

Attributes: Popular general purpose belt with interwoven carcass and smooth PVC top cover. Bottom cover is brushed clean to lower the coefficient of friction. High strength, low stretch belt.

Applications: Medium duty general purpose conveyor belt that can be used in packaging, agriculture, paper, recycling and most industries. Made in the USA.

** The data contained here are approximate values dependent on belt dimensions, application and environment and is for reference only. It is believed to be reliable, but no representations, guarantees or warranties of any kind are made to its accuracy or suitability for any particular purpose. It is recommended that users conduct their own evaluations for the intended application.*